

>>>

>>>Mortise Lock

>>>

Hardwood Door Control Tech (Ningbo) Co., Ltd.



Entrance lock with deadbolt

Function(ANSI/BHMA A156.13-2017):F20

Latchbolt is retracted by knob/lever from either side unless outside is locked by key outside or 20° rotation of thumbturn. Deadbolt is thrown or retracted by 90° rotation of thumbturn. When locked, key outside or knob/lever inside retracts deadbolt and latchbolt simultaneously. Outside knob/lever remains locked until thumbturn is returned to vertical position. Throwing deadbolt automatically locks outside knob/lever. Auxiliary latch deadlocks latchbolt when door is locked. Vandgard function allows exterior lever to rotate freely down while remaining securely locked.



DL20 Entrance lock with deadbolt

Key Features


- BHMA Certified Grade 1 Mortise lock
- ANSI/UL 10C Standard
- Solid SS304 Levers
- Various Levers Styles Available



Three Keys





Simple Installation



Thickness Of Door



Withstand Bad Weather

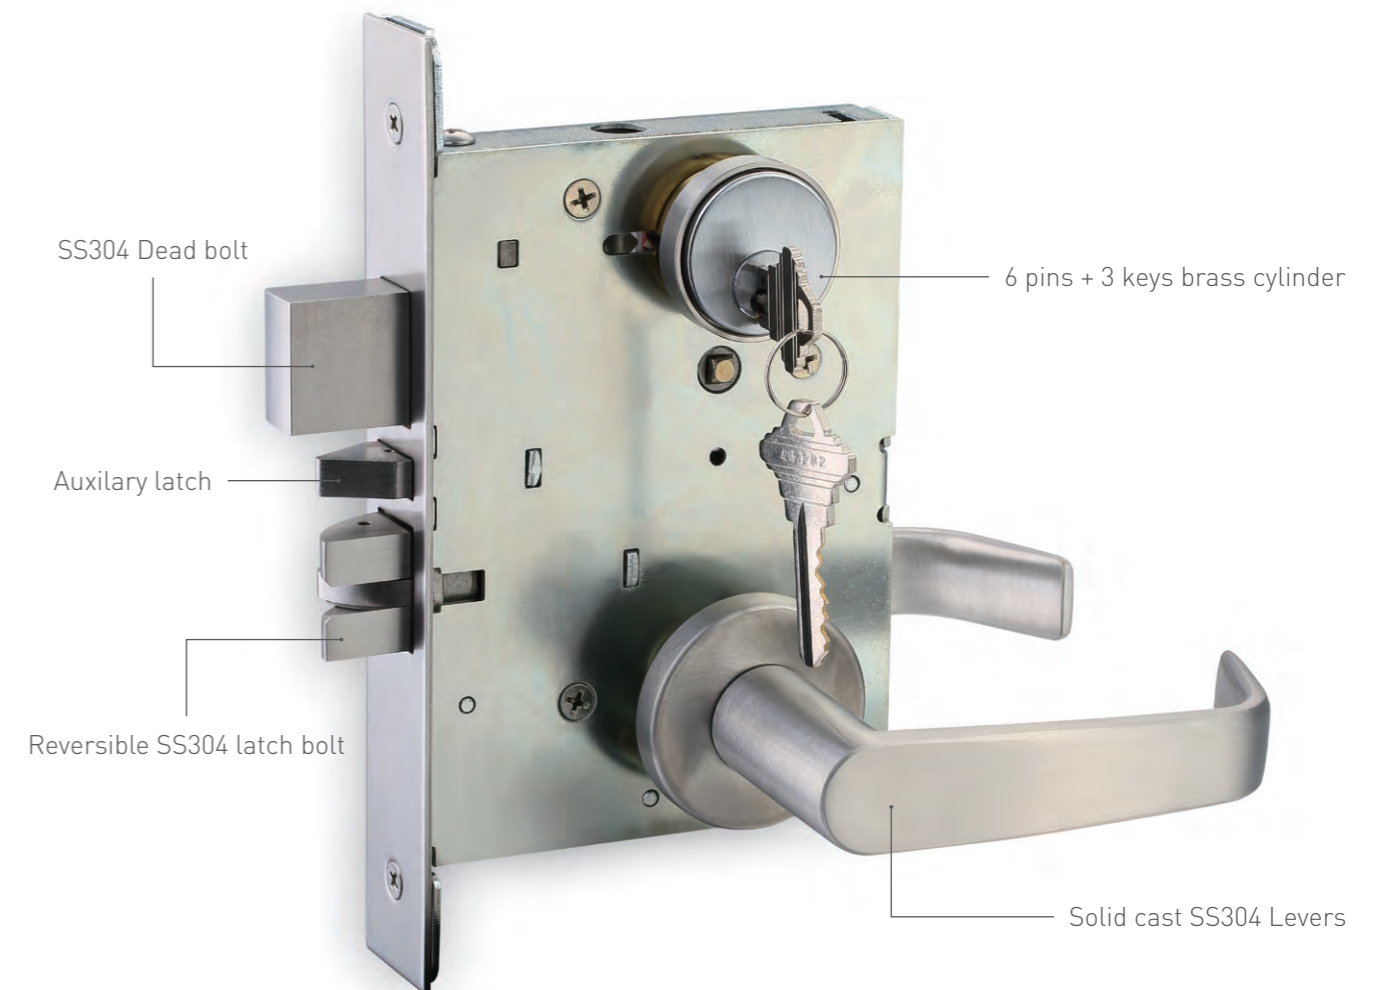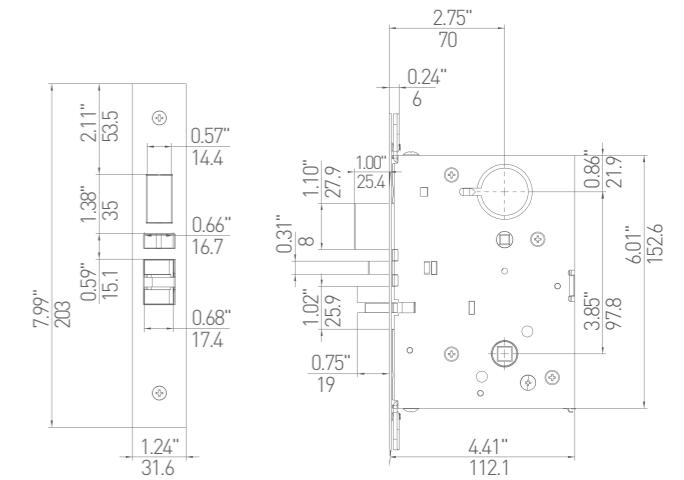

Certificates



Finishes Available



US32D



















US19



US4

Part NO.	DL20
Usable Range	Wooden Door, Metal Door
Door Thickness	45-55mm
Lockcase Center Distance	98mm
Backset	70mm
Handle	LE01, LE02, LE03, LE04

P/N							
	<table border="1"> <tr> <td>DL01</td> <td>Passage latch</td> </tr> <tr> <td colspan="2">Function(ANSI/BHMA A156.13-2017):F01</td> </tr> <tr> <td colspan="2">Latchbolt is always retracted by knob/lever from either side.</td> </tr> </table>	DL01	Passage latch	Function(ANSI/BHMA A156.13-2017):F01		Latchbolt is always retracted by knob/lever from either side.	
DL01	Passage latch						
Function(ANSI/BHMA A156.13-2017):F01							
Latchbolt is always retracted by knob/lever from either side.							
	<table border="1"> <tr> <td>DL04</td> <td>Entrance/office and inner entry lock with Vandlgard</td> </tr> <tr> <td colspan="2">Function(ANSI/BHMA A156.13-2017):F04</td> </tr> <tr> <td colspan="2">Latchbolt is retracted by knob/lever from either side unless outside is made inoperative by key outside or inside thumbturn. When outside is locked, latchbolt is retracted by key outside or by knob/lever inside. Outside knob/lever remains locked until thumbturn is returned to vertical position or unlocked by key. Auxiliary latch deadlocks latchbolt when door is locked. Inside knob/lever is always free for immediate egress. Vandlgard function allows exterior lever to rotate freely down while remaining securely locked.</td> </tr> </table>	DL04	Entrance/office and inner entry lock with Vandlgard	Function(ANSI/BHMA A156.13-2017):F04		Latchbolt is retracted by knob/lever from either side unless outside is made inoperative by key outside or inside thumbturn. When outside is locked, latchbolt is retracted by key outside or by knob/lever inside. Outside knob/lever remains locked until thumbturn is returned to vertical position or unlocked by key. Auxiliary latch deadlocks latchbolt when door is locked. Inside knob/lever is always free for immediate egress. Vandlgard function allows exterior lever to rotate freely down while remaining securely locked.	
DL04	Entrance/office and inner entry lock with Vandlgard						
Function(ANSI/BHMA A156.13-2017):F04							
Latchbolt is retracted by knob/lever from either side unless outside is made inoperative by key outside or inside thumbturn. When outside is locked, latchbolt is retracted by key outside or by knob/lever inside. Outside knob/lever remains locked until thumbturn is returned to vertical position or unlocked by key. Auxiliary latch deadlocks latchbolt when door is locked. Inside knob/lever is always free for immediate egress. Vandlgard function allows exterior lever to rotate freely down while remaining securely locked.							
	<table border="1"> <tr> <td>DL05</td> <td>Classroom lock with Vandlgard</td> </tr> <tr> <td colspan="2">Function(ANSI/BHMA A156.13-2017):F05</td> </tr> <tr> <td colspan="2">Latchbolt is retracted by knob/lever from either side unless outside is locked by key. Outside is unlocked by key. Inside knob/lever is always free for immediate egress. Auxiliary latch deadlocks latchbolt when door is locked. Vandlgard function allows exterior lever to rotate freely down while remaining securely locked.</td> </tr> </table>	DL05	Classroom lock with Vandlgard	Function(ANSI/BHMA A156.13-2017):F05		Latchbolt is retracted by knob/lever from either side unless outside is locked by key. Outside is unlocked by key. Inside knob/lever is always free for immediate egress. Auxiliary latch deadlocks latchbolt when door is locked. Vandlgard function allows exterior lever to rotate freely down while remaining securely locked.	
DL05	Classroom lock with Vandlgard						
Function(ANSI/BHMA A156.13-2017):F05							
Latchbolt is retracted by knob/lever from either side unless outside is locked by key. Outside is unlocked by key. Inside knob/lever is always free for immediate egress. Auxiliary latch deadlocks latchbolt when door is locked. Vandlgard function allows exterior lever to rotate freely down while remaining securely locked.							
	<table border="1"> <tr> <td>DL07</td> <td>Storeroom lock</td> </tr> <tr> <td colspan="2">Function(ANSI/BHMA A156.13-2017):F07</td> </tr> <tr> <td colspan="2">Latchbolt is retracted by key outside or by knob/lever inside. Outside knob/lever is always inoperative. Auxiliary latch deadlocks latchbolt when door is locked. Inside knob/lever is always free for immediate egress.</td> </tr> </table>	DL07	Storeroom lock	Function(ANSI/BHMA A156.13-2017):F07		Latchbolt is retracted by key outside or by knob/lever inside. Outside knob/lever is always inoperative. Auxiliary latch deadlocks latchbolt when door is locked. Inside knob/lever is always free for immediate egress.	
DL07	Storeroom lock						
Function(ANSI/BHMA A156.13-2017):F07							
Latchbolt is retracted by key outside or by knob/lever inside. Outside knob/lever is always inoperative. Auxiliary latch deadlocks latchbolt when door is locked. Inside knob/lever is always free for immediate egress.							
	<table border="1"> <tr> <td>DL13</td> <td>Corridor lock with deadbolt</td> </tr> <tr> <td colspan="2">Function(ANSI/BHMA A156.13-2017):F13</td> </tr> <tr> <td colspan="2">Latchbolt is retracted by knob/lever from either side. Deadbolt is operated by key outside or inside thumbturn. Throwing deadbolt locks outside knob/lever. Turning inside knob/lever simultaneously retracts deadbolt and latchbolt and unlocks outside knob/lever. Inside knob/lever is always free for immediate egress.</td> </tr> </table>	DL13	Corridor lock with deadbolt	Function(ANSI/BHMA A156.13-2017):F13		Latchbolt is retracted by knob/lever from either side. Deadbolt is operated by key outside or inside thumbturn. Throwing deadbolt locks outside knob/lever. Turning inside knob/lever simultaneously retracts deadbolt and latchbolt and unlocks outside knob/lever. Inside knob/lever is always free for immediate egress.	
DL13	Corridor lock with deadbolt						
Function(ANSI/BHMA A156.13-2017):F13							
Latchbolt is retracted by knob/lever from either side. Deadbolt is operated by key outside or inside thumbturn. Throwing deadbolt locks outside knob/lever. Turning inside knob/lever simultaneously retracts deadbolt and latchbolt and unlocks outside knob/lever. Inside knob/lever is always free for immediate egress.							

P/N							
	<table border="1"> <tr> <td>DL17</td> <td>Cylinder by thumbturn lock</td> </tr> <tr> <td colspan="2">Function(ANSI/BHMA A156.13-2017):F17</td> </tr> <tr> <td colspan="2">Deadbolt is operated by key outside or thumbturn inside.</td> </tr> </table>	DL17	Cylinder by thumbturn lock	Function(ANSI/BHMA A156.13-2017):F17		Deadbolt is operated by key outside or thumbturn inside.	
DL17	Cylinder by thumbturn lock						
Function(ANSI/BHMA A156.13-2017):F17							
Deadbolt is operated by key outside or thumbturn inside.							
	<table border="1"> <tr> <td>DL18</td> <td>Cylinder lock</td> </tr> <tr> <td colspan="2">Function(ANSI/BHMA A156.13-2017):F18</td> </tr> <tr> <td colspan="2">Deadbolt is operated by key on one side. No trim on opposite side. Available with rose trim only.</td> </tr> </table>	DL18	Cylinder lock	Function(ANSI/BHMA A156.13-2017):F18		Deadbolt is operated by key on one side. No trim on opposite side. Available with rose trim only.	
DL18	Cylinder lock						
Function(ANSI/BHMA A156.13-2017):F18							
Deadbolt is operated by key on one side. No trim on opposite side. Available with rose trim only.							
	<table border="1"> <tr> <td>DL20</td> <td>Entrance lock with deadbolt</td> </tr> <tr> <td colspan="2">Function(ANSI/BHMA A156.13-2017):F20</td> </tr> <tr> <td colspan="2">Latchbolt is retracted by knob/lever from either side unless outside is locked by key outside or 20° rotation of thumbturn. Deadbolt is thrown or retracted by 90° rotation of thumbturn. When locked, key outside or knob/lever inside retracts deadbolt and latchbolt simultaneously. Outside knob/lever remains locked until thumbturn is returned to vertical position. Throwing deadbolt automatically locks outside knob/lever. Auxiliary latch deadlocks latchbolt when door is locked. Vandlgard function allows exterior lever to rotate freely down while remaining securely locked.</td> </tr> </table>	DL20	Entrance lock with deadbolt	Function(ANSI/BHMA A156.13-2017):F20		Latchbolt is retracted by knob/lever from either side unless outside is locked by key outside or 20° rotation of thumbturn. Deadbolt is thrown or retracted by 90° rotation of thumbturn. When locked, key outside or knob/lever inside retracts deadbolt and latchbolt simultaneously. Outside knob/lever remains locked until thumbturn is returned to vertical position. Throwing deadbolt automatically locks outside knob/lever. Auxiliary latch deadlocks latchbolt when door is locked. Vandlgard function allows exterior lever to rotate freely down while remaining securely locked.	
DL20	Entrance lock with deadbolt						
Function(ANSI/BHMA A156.13-2017):F20							
Latchbolt is retracted by knob/lever from either side unless outside is locked by key outside or 20° rotation of thumbturn. Deadbolt is thrown or retracted by 90° rotation of thumbturn. When locked, key outside or knob/lever inside retracts deadbolt and latchbolt simultaneously. Outside knob/lever remains locked until thumbturn is returned to vertical position. Throwing deadbolt automatically locks outside knob/lever. Auxiliary latch deadlocks latchbolt when door is locked. Vandlgard function allows exterior lever to rotate freely down while remaining securely locked.							
	<table border="1"> <tr> <td>DL21</td> <td>Dormitory/bedroom lock</td> </tr> <tr> <td colspan="2">Function(ANSI/BHMA A156.13-2017):F21</td> </tr> <tr> <td colspan="2">Latchbolt is operated by knob/lever from either side. Deadbolt is operated by key outside or thumbturn inside.</td> </tr> </table>	DL21	Dormitory/bedroom lock	Function(ANSI/BHMA A156.13-2017):F21		Latchbolt is operated by knob/lever from either side. Deadbolt is operated by key outside or thumbturn inside.	
DL21	Dormitory/bedroom lock						
Function(ANSI/BHMA A156.13-2017):F21							
Latchbolt is operated by knob/lever from either side. Deadbolt is operated by key outside or thumbturn inside.							
	<table border="1"> <tr> <td>DL22</td> <td>Bath/bedroom privacy lock with Vandlgard</td> </tr> <tr> <td colspan="2">Function(ANSI/BHMA A156.13-2017):F22</td> </tr> <tr> <td colspan="2">Latchbolt is retracted by knob/lever from either side unless outside is locked by inside thumbturn. Turning inside knob/lever or closing door unlocks outside knob/lever. To unlock from outside, remove emergency button, insert emergency turn in access hole and rotate. Vandlgard function allows exterior lever to rotate freely down while remaining securely locked.</td> </tr> </table>	DL22	Bath/bedroom privacy lock with Vandlgard	Function(ANSI/BHMA A156.13-2017):F22		Latchbolt is retracted by knob/lever from either side unless outside is locked by inside thumbturn. Turning inside knob/lever or closing door unlocks outside knob/lever. To unlock from outside, remove emergency button, insert emergency turn in access hole and rotate. Vandlgard function allows exterior lever to rotate freely down while remaining securely locked.	
DL22	Bath/bedroom privacy lock with Vandlgard						
Function(ANSI/BHMA A156.13-2017):F22							
Latchbolt is retracted by knob/lever from either side unless outside is locked by inside thumbturn. Turning inside knob/lever or closing door unlocks outside knob/lever. To unlock from outside, remove emergency button, insert emergency turn in access hole and rotate. Vandlgard function allows exterior lever to rotate freely down while remaining securely locked.							
Certificates							
  							
Key Features							
<ul style="list-style-type: none"> • BHMA Certified Grade 1 Mortise lock • ANSI/UL 10C Standard • Solid SS304 Levers • Various Levers Styles Available 							
Finishes Available							
 US32D  US19  US4							
Product parameters							
Usable Range: Wooden Door, Metal Door Door Thickness: 45-55mm Lockcase Center Distance: 98mm Backset: 70mm Handle: LE01, LE02, LE03, LE04							

Apartment Corridor Door Lock

Function (ANSI/BHMA A156.13-2017) F20

Latch bolt operated by lever from either side, except when outside lever is made inoperative by a stop or mechanical means other than key. Dead bolt operated by key outside or turn inside. Key outside operates both bolts. Operating inside lever retracts both bolts and outside remains locked. Latch bolt is deadlocked when outside lever is made inoperative or when the dead bolt is projected. When dead bolt is retracted, lever is unlocked by stop or mechanical means other than key.



GL43 Apartment Corridor Door Lock

Key Features


- BHMA Certified Grade 1 Mortise lock
- ANSI/UL 10C Standard
- Solid SS304 Levers
- Various Levers Styles Available



Three Keys





Simple Installation



Thickness Of Door



Withstand Bad Weather

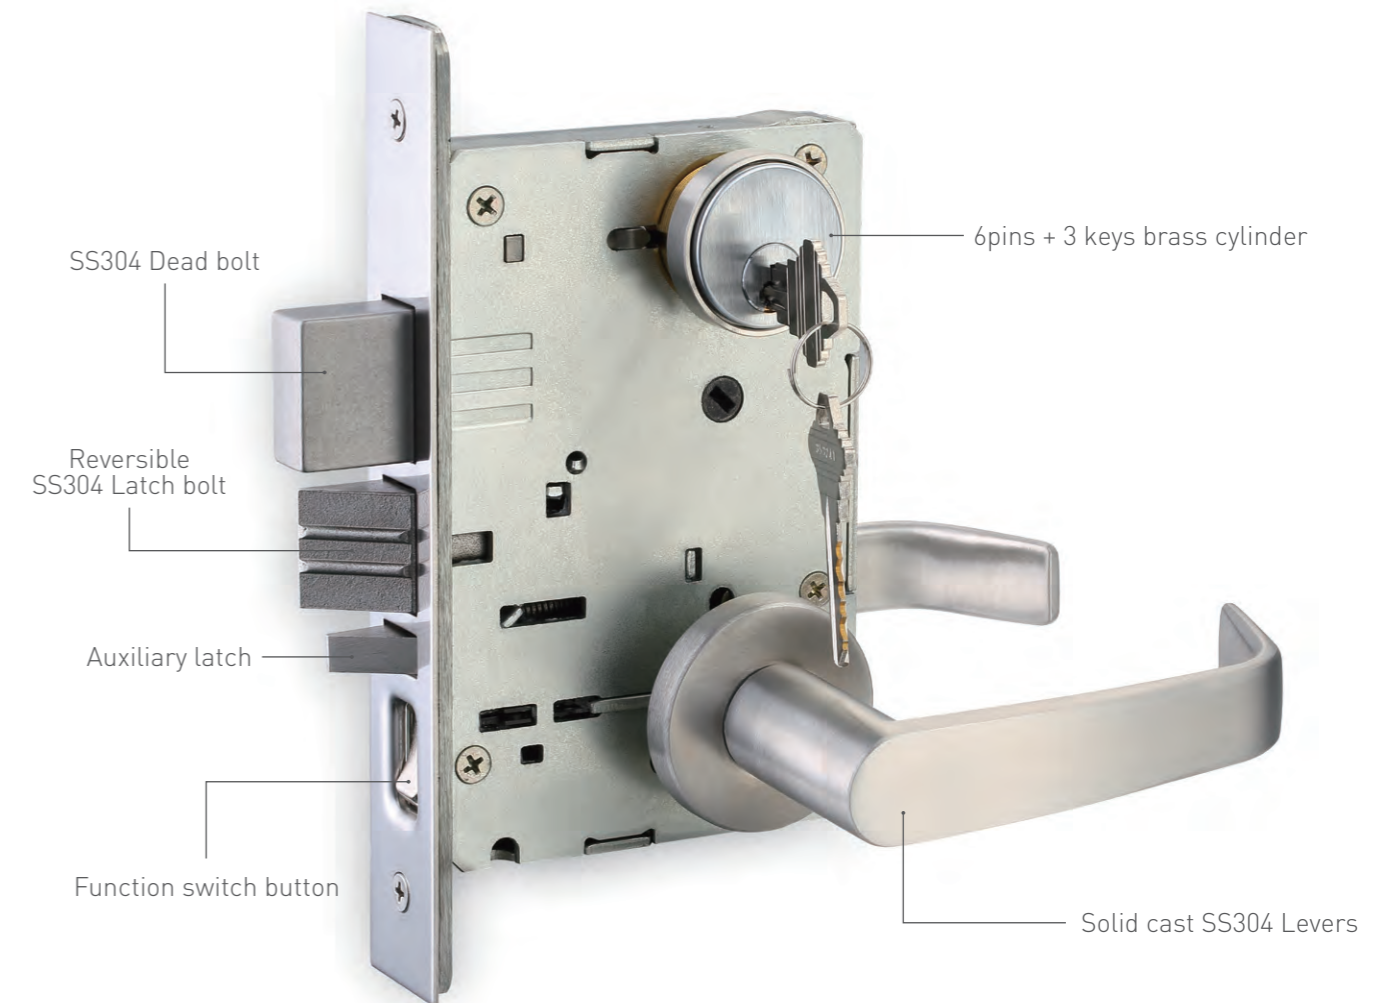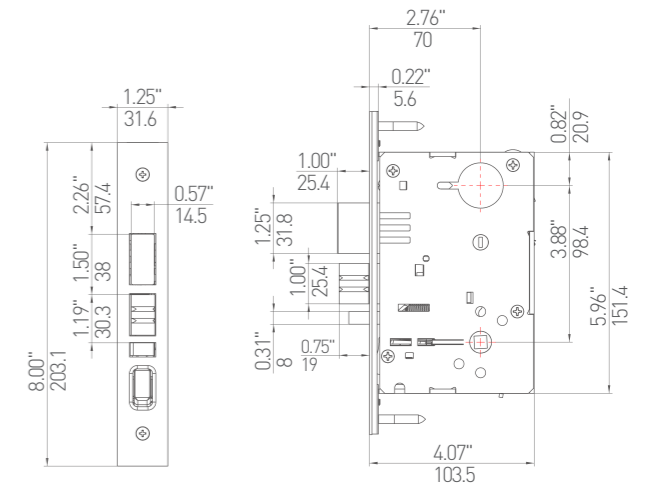

Certificates














Finishes Available



Part NO.	GL43
Usable Range	Wooden Door, Metal Door
Door Thickness	45-55mm
Lockcase Center Distance	98mm
Backset	70mm
Handle	LE01, LE02, LE03, LE04

P/N	
	GL15 Passage or Closet Latch
	Function(ANSI/BHMA A156.13-2017):F01 Latch bolt operated by lever from either side at all times.
	GL05 Entry Lock
	Function(ANSI/BHMA A156.13-2017):F04 Latch bolt operated by lever from either side except when outside lever is made inoperative by a stop or mechanical means other than key. When outside lever is locked, latch bolt is retracted by key from outside or by operating inside lever. Auxiliary dead latch.
	GL37 Classroom Lock
	Function(ANSI/BHMA A156.13-2017):F05 Latched bolt operated by lever from either side except when outside lever or knob is locked from outside by key. When outside lever is locked, latch bolt is retracted by key, or by operating key and outside lever from outside or by operating inside lever. Auxiliary dead latch.
	GL04 Storeroom or Closet Lock
	Function(ANSI/BHMA A156.13-2017):F07 Latched bolt operated by key from outside or by operating inside lever. Outside lever is always inoperative. Auxiliary dead latch.
	GL25 Dormitory or Exit Lock
	Function(ANSI/BHMA A156.13-2017):F13 Latched bolt operated by lever from either side. Dead bolt projected by key from outside and turn from inside. Operating inside lever retracts both bolts and unlocks outside.

P/N	
	GL21 Dead Lock
	Function(ANSI/BHMA A156.13-2017):F17 Dead bolt operated by key from outside and by turn from inside.
	GL20 Dead Lock
	Function(ANSI/BHMA A156.13-2017):F18 Dead bolt operated by key from outside only.
	GL24 Room Door Lock
	Function(ANSI/BHMA A156.13-2017):F21 Latched bolt operated by lever from either side. Dead bolt operated by key from outside and turn from inside.
	GL43 Apartment Corridor Door Lock
	Function(ANSI/BHMA A156.13-2017):F20 Latched bolt operated by lever from either side, except when outside lever is made inoperative by a stop or mechanical means other than key. Dead bolt operated by key outside or turn inside. Key outside operates both bolts. Operating inside lever retracts both bolts and outside remains locked. Latched bolt is deadlocked when outside lever is made inoperative or when the dead bolt is projected. When dead bolt is retracted, lever is unlocked by stop or mechanical means other than key.
	GL65 Privacy, Bedroom or Bath Lock
	Function(ANSI/BHMA A156.13-2017):F22 Latched bolt operated by lever from either side except when outside lever is locked by inside turn or button. Operating inside lever, closing door or operating outside emergency release unlocks outside lever.
Certificates	
  	
Key Features	
<ul style="list-style-type: none"> • BHMA Certified Grade 1 Mortise lock • ANSI/UL 10C Standard • Solid SS304 Levers • Various Levers Styles Available 	
Finishes Available	
 US32D  US19  US4	
Product parameters	
Usable Range: Wooden Door, Metal Door Door Thickness: 45-55mm Lockcase Center Distance: 98mm Backset: 70mm Handle: LE01, LE02, LE03, LE04	


BL-001 Indicated Bathroom Lock

Key Features


- BHMA Certified Grade 2
- ANSI/UL 10C Standard
- Zinc Alloy Levers
- Four Levers Styles Available



Simple Installation



Thickness Of Door

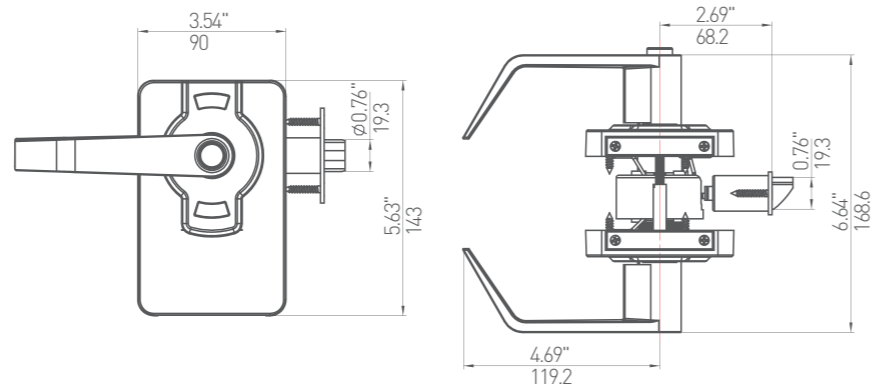

Certificates




Finishes Available



Part NO.	BL-001
Usable Range	Wooden Door, Metal Door
Door Thickness	35-45mm
Backset	70mm
Handle	Four Levers Style Available



PPL-001 Hospital Latch

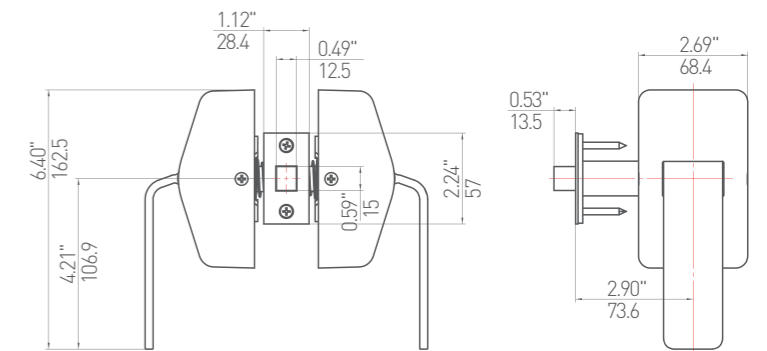

Certificates



Finishes Available



Key Features

- BHMA Certified Grade 1
- ANSI/UL 10C Standard
- Solid SS304 Levers

Part NO.	PPL-001
Usable Range	Wooden Door, Metal Door
Door Thickness	45-55mm
Backset	70mm



HANDLE SELECTION

Our products are manufactured from high quality stainless steel 304. It ensures that the corrosion resistance of our products is maintained throughout the lifecycle. Without sacrificing aesthetics of the products we are continuing to improve easy to install feature.

Key Features

- Solid cast lever
- Material SS304
- Various Finishes available

Certificates



Finishes Available



US32D





US19




US4




LE01 Lever Model

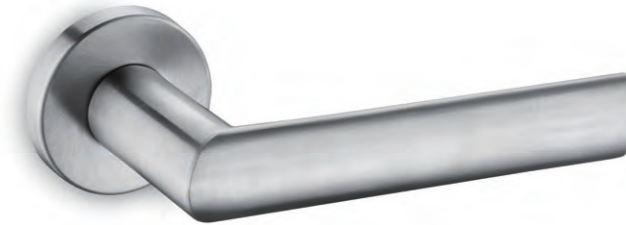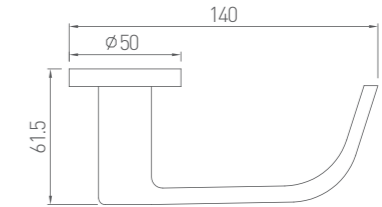


LE02 Lever Model

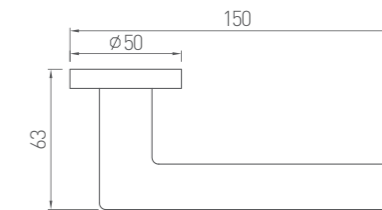

LE03 Lever Model

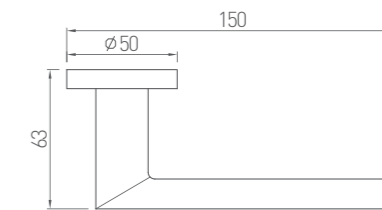

LE04 Lever Model

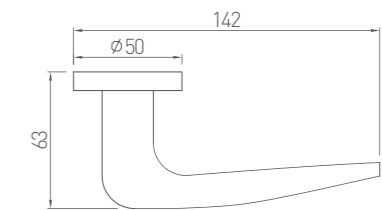


COMPANY PROFILE

Your most trusted partner



30 years
Experience

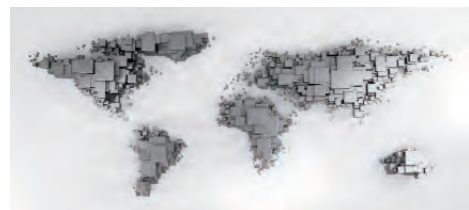

Hardwood is an innovative and professional company engaged in research, development, design and manufacturing of Locksets, fittings, sliding door system and numerous architectural hardware. The founder and core members have over 30 years' experience in door control industry. Our vision is to be the expert on functional and decorative security products and accessories. We believe true value can only be created by continuous dedication. Hardwood aims always to be your most reliable partner in supplying locksets and architectural hardware.

DESIGN & DEVELOPMENT

Continuous innovation and continuous development

Hardwood management team recognizes and deeply understand innovation and continuous improvement are key driven force for the company. We keep investing in R&D activities and have clearly defined growing annual budget for it. Engineers are using modern software, such as Solidworks and Creo to design internal structure and esthetic appearance.

We keep following new trends, products and techniques in the door control industry. Every quarter Hardwood has regular seminar on new products / trends and each year we set a plan to launch numerous new products.



PRODUCTION & INSPECTION EQUIPMENT

Quality production, strict quality control



Not only we invest heavily in R&D activities but Hardwood also deeply understand design should be perfectly matched with most advanced manufacturing techniques. We design critical parts toolings fully in house and we have invested such as AgieCharmilles machining centers. To control the quality of the manufacturing parts Hardwood also invests CMM and other projector measurement devices to inspect and verify critical tolerances. We understand the creativity sparked by R&D staff plus over years' experience in manufacturing will contribute to the novelty, quality and cost effectiveness of our product.



CERTIFICATE

Your most trusted partner

The factory manufacturing is under ISO 9001 quality management system. Numerous products have passed UL certification.





CASE PRESENTATION

Your most trusted partner

Our products are widely used in hospitals, schools, business centers, airports, government agencies, hotels, libraries, art galleries, bathrooms, dormitories, bedrooms, and so on

Ningbo Wisdom Garden

Hangzhou Bay New Zone

Zhejiang Cargo Warehouse

Zhejiang Women And Children Hospital

Zhejiang Medical University

Ningbo Zhenhai District Library

Zhejiang Btower Commercial Center

Zhejiang Liangzhu Art Museum

